


QUALITIUM AGRI STOU 10W/30

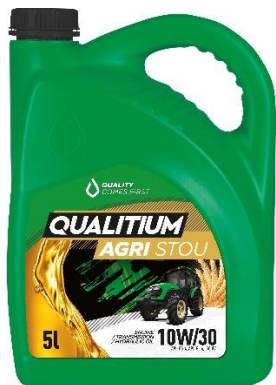

SPECIFICATIONS

API: CG-4/CF-4/CF/SF

API: GL-4

ACEA: E3

SAE: 10W/30

ISO HV

MEETS REQUIREMENTS

Allison C-4

Case New Holland (CNH) MAT 3525/3526

Caterpillar TO-2

Ford M2C 159B/C, M2C 86B/C, M2C 134D

J.I Case MS-1204/6/7/9

John Deere J27/J20D/J20C

MAN 271

Massey Ferguson M1135/M1139/M1143/

M1144/M1145

MB 228.1/227.1

New Holland 82009201/2/3

Sperry Vickers/Eaton M2950S/I-280-S

ZF-TE ML 06A/06B/06C/07B

May be used in the following vehicles: AGCO, BELARUS, CASE, CLASS, DEUTZ-FAHR, DRESSER, FENDT, FIAT, HOLDER, HARVESTER, HYUNDAI, JCB, JOHN-DEERE, KUHN, KUBOTA, LAMBORGHINI, LANDINI, MARSHALL, MASSEY-FERGUSON, MITSUBISHI, NEW HOLLAND, PRONAR, RENAULT, STEYER, URSUS, VERMEER, ZETOR and others when oil of this grade is recommended.

REPLACEMENT OILS

Mobil	Fuchs	Castrol
Agri Super 10W/30	Agrifarm STOU MC 10W/30	Transmax Agri MP Plus 10W/30
TotalEnergies	Orlen Oil	MOL
TP Star Max FE 10W/30	Agro STOU 10W/30	Farm STOU 10W/30

Multifunctional oil produced in synthetic technology for agricultural machinery.

APPLICATION

- engine oil/gear oil/hydraulic oil for agricultural and construction equipment
- for modern engines in agricultural and construction equipment
- for manual gearboxes operating in severe applications
- hydrokinetic transmissions
- hydraulic systems
- wet clutches and brakes

ADVANTAGES

Qualitium Agri STOU 10W/30 produced in synthetic technology guarantees higher cleanliness of the lubrication system by min. 25% - compared to similar oils.

- guarantees thorough lubrication between interacting components
- one oil for all lubrication systems of modern tractor units reduces the likelihood of making a mistake
- optimum operation of transmissions, clutches and wet brakes
- contains a proper package of additives, which may be applied in systems with Limited Slip requirements
- minimum oil loss results in smaller refills and economy
- excellent anti-foam properties
- exhibits parameter stability, resists oxidation

Parameters	Value
Kinematic viscosity at 100°C (mm ² /s)	11,3
Viscosity index	150
Flash point (COC, °C)	228
Pour point (°C)	-45

* The above are typical physicochemical values. The actual physicochemical values are to be found in the laboratory report attached to each batch of the product.

AVAILABLE OIL VOLUMES

5L, 20L, 205L, 1000L

DETAILS OF THE COMPANY/TECHNICAL DEPARTMENT

Qualitium Sp. z o.o.

Brzeście Nowe 11B/2, 09-130 Baboszewo

Guaranteed storage period 3 years from production date. Production date and batch number are on the packaging.